

ADAN EVO

Adjustable downlights

design Roberto Mantovani



The Adan EVO range combines extremely small sizes with luminous fluxes that are suitable for general lighting. Equipped with Fidelity LED it places emphasis on CRI98 and R9 93. Available in seven finishes, seven colour temperatures and two extremely clean and performing optics.

La gamma Adan EVO combina dimensioni estremamente ridotte a flussi luminosi tali da prestarsi ad illuminazioni generali. Equipaggiato con LED Fidelity si connota per un CRI98 e R9 93. Disponibile in sette finiture, sette temperature colore e due ottiche estremamente pulite e performanti.

La gamme Adan EVO combine des dimensions extrêmement réduites à des flux lumineux qui lui permettent de se prêter à des éclairages généraux. Équipé avec LED Fidelity il se caractérise par un CRI98 et R9 93. Disponible dans sept finitions, sept températures couleur et deux optiques extrêmement propres et performantes.



IP44 made in Italy

Die Adan EVO-Serie kombiniert extrem kleine Abmessungen mit Lichtströmen und ist somit für die Allgemeinbeleuchtung geeignet. Ausgestattet mit Fidelity-LEDs zeichnet sie sich durch einen CRI98 und R9 93 aus. Erhältlich in sieben Ausführungen, sieben Farbtemperaturen und zwei extrem sauberen und leistungsstarken Optiken.

La gama Adan EVO combina dimensiones extremadamente pequeñas con flujos luminosos adecuados para iluminaciones generales. Equipado con LED Fidelity, se caracteriza por un CRI98 y R9 93. Disponible en siete acabados, siete temperaturas de color y dos ópticas extremadamente sutiles y de alto rendimiento.

Supply current
500mA (V_i 9V)


Power
6W

Series wiring


CRI
98

2-Step MacAdam

Dimensions




Photometric diagrams



CCT/CRI/Flux


| | |
|-------|--------|
| 2700K | 540 lm |
| 3000K | 600 lm |
| 4000K | 620 lm |

Code construction

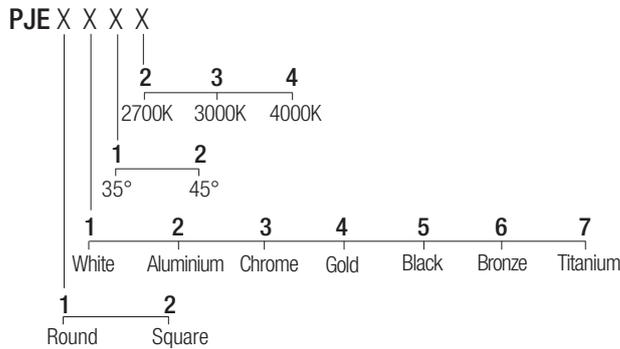

Accessories

CS1005
Recessing box



LPJE01
Low luminance louver



SPJE01
Milky screen



Note: The filter and the screen must be ordered together with the lighting fixture.

AL7022
24VDC/500mA constant current converter

Drivers 500mA

on/off
AL1074 (1..2) IP20 30 mm
AL1077 (1..2) IP20 40 mm
AL1084 (1..3) IP20 S.P. 55 mm

dimmmable
AL4010 (1..4) IP20 PUSH 0/1..10V 72 mm
ALD450 (1..2) IP20 DALI 2 PUSH 36 mm
AL4151 (1..4) IP20 DALI 2 72 mm
AL4153 (1..4) IP20 PUSH IGBT-TRIAC 56 mm