

## AIR 6

Pathlights

design Roberto Mantovani




The Air range offers IP67-rated, recessed ground fixtures for grazing lighting of the highest build quality and attention to detail in extremely compact dimensions. The use of advanced waterproofing technology guarantees absolute product reliability. Versions with front in walkable, double powder-coated, anodized aluminium and vehicle-proof AISI 316L stainless steel.

La gamma Air offre incassi a terra IP67 per luce in radenza di altissima qualità costruttiva, nei quali la cura del dettaglio si unisce a dimensioni estremamente contenute. L'uso di tecnologie di impermeabilizzazione evolute garantisce una assoluta affidabilità del prodotto. Le versioni con frontale in alluminio trattato con doppia verniciatura a polveri sono calpestabili, le versioni con frontale in INOX AISI 316L sono carrabili.

La gamme Air propose des encastrables au sol IP67 pour lumière à ras de très haute qualité constructive, dans lesquels le soin du détail s'unit à des dimensions extrêmement contenues. L'utilisation de technologies d'imperméabilisation avancées garantit une fiabilité absolue du produit. Les versions avec frontal en aluminium traité avec double peinture en poudre sont praticables, les versions avec frontal en INOX AISI 316L sont carrossables.

Die Produktreihe Air bietet den Einbau am Boden mit Schutzklasse IP67 für Streiflicht von sehr hoher konstruktiver Qualität, bei welcher die Liebe zum Detail sich mit extrem kleiner Größe kombiniert. Die Verwendung moderner Abdichtungstechniken garantiert absolute Produktzuverlässigkeit. Die Versionen mit Vorderteil aus behandeltem Aluminium mit Doppelpulverbeschichtung sind begehbar, die Versionen mit Vorderteil aus Edelstahl AISI 316L sind befahrbar.

IP67 made in Italy



### Supply current

350-500mA (V, 8,7V)

### Power

3-6W


### Series wiring

### CRI

85

### 2-Step MacAdam

### Dimensions




### CCT/CRI/Flux

	350mA	500mA
2700K	267lm	384lm
3000K	279lm	400lm
4200K	309lm	462lm
6000K	342lm	495lm

### Code construction

XR2 X X X

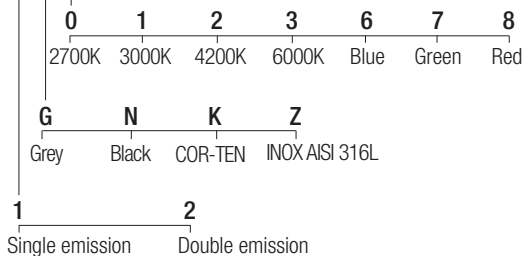


Note: Made-to-measure cable available on request.

### Accessories

#### CSXT01

Recessing box



### Drivers 350mA

on/off

AL1034 (1..3) IP20 ⌀ 30 mm

AL1035 (1..3) IP20 ⌀ 40 mm

AL1037 (1..5) IP20 S.P. ⌀ 55 mm

AL9011 (1..4) IP67 ⌀ 44 mm

dimmmable

AL4000 (1..4) IP20 PUSH 0/1..10V ⌀ 72 mm

ALD435 (1..3) IP20 DALI 2 PUSH ⌀ 36 mm

AL4051 (1..4) IP20 DALI 2 ⌀ 72 mm

AL4053 (1..4) IP20 PUSH IGBT-TRIAC ⌀ 56 mm

AL6035 (1..3) IP67 DALI 2 ⌀ 44 mm

AL8035 (2..4) IP67 DALI 2 ⌀ 48 mm

### Drivers 500mA

on/off

AL1074 (1..2) IP20 ⌀ 30 mm

AL1077 (1..2) IP20 ⌀ 40 mm

AL1084 (1..3) IP20 S.P. ⌀ 55 mm

AL9051 (1..3) IP67 ⌀ 44 mm

dimmmable

AL4010 (1..4) IP20 PUSH 0/1..10V ⌀ 72 mm

ALD450 (1..2) IP20 DALI 2 PUSH ⌀ 36 mm

AL4151 (1..4) IP20 DALI 2 ⌀ 72 mm

AL4153 (1..4) IP20 PUSH IGBT-TRIAC ⌀ 56 mm

AL6050 (1..2) IP67 DALI 2 ⌀ 44 mm

AL8050 (2..4) IP67 DALI 2 ⌀ 48 mm