

ALOHA 524

IP rated projectors

design Roberto Mantovani



The Aloha range offers IP65-rated spotlights in anodized aluminium, ideal for installation in particularly aggressive environments. Optical quality and fine finishes combine to make a highly dependable product. Using the base accessory, the fixture can be wall or ceiling mounted. Can be equipped with anti-glare filter for maximum viewing comfort.

La gamma Aloha offre proiettori IP65 in alluminio anodizzato, ideali all'installazione in ambienti particolarmente aggressivi. Qualità ottica e finiture di pregio si fondono in un prodotto di grande affidabilità. Tramite l'accessorio base è possibile installare l'apparecchio a soffitto o parete. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

La gamme Aloha propose des projecteurs IP65 en aluminium anodisé, adaptés pour l'installation dans des milieux particulièrement agressifs. Qualité optique et finitions de qualité fusionnent dans un produit de grande fiabilité. Avec l'accessoire base, il est possible d'installer l'appareil au plafond ou au mur. Peuvent être équipés avec filtre anti-éblouissement pour le meilleur confort visuel.

Die Produktreihe Aloha bietet Leuchten mit Schutzklasse IP65 aus eloxierten Aluminium, geeignet für die Installation in besonders aggressiven Umgebungen. Optische Qualität und feine Ausführungen verbinden sich in einem Produkt von großer Zuverlässigkeit. Mit dem Basiszubehör kann das Gerät an der Decke oder der Wand installiert werden. Kann mit Blendschutzfilter ausgestattet werden für maximalen visuellen Komfort.

IP65 made in Italy



Supply current

24VDC

Power

6W


Parallel wiring

CRI


85

2-Step MacAdam

Dimensions




Photometric diagrams

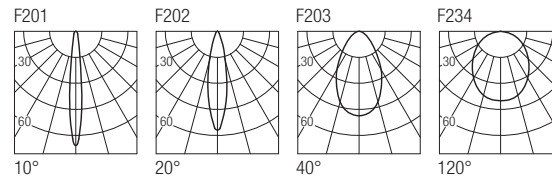

CCT/CRI/Flux

2700K	384 lm
3000K	400 lm
4200K	462 lm
6000K	495 lm

Code construction

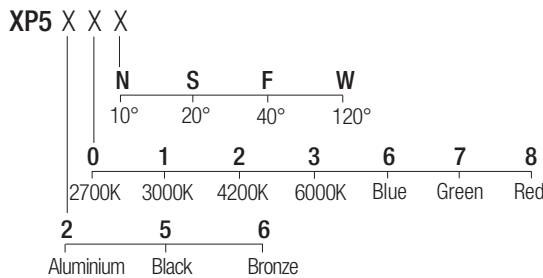


Note: Made-to-measure cable available on request.

Accessories

XP0022

Earth spike



XP0200

Aluminium


Base

XP0500

Black

XP0600

Bronze



L0052

Aluminium
Low luminance louver

L0055

Black

L0056

Bronze



XNTX202

Aluminium

Antiglare snoot

XNTX205

Black

XNTX206

Bronze



XXT01

Tree strap



Drivers 24VDC

on/off

AL2124 (1) IP20 ⌀28 mm

AL2012 (1..4) IP20 ⌀60 mm

AL2031 (1..11) IP20 ⌀70 mm

AL2040 (1..25) IP20 ⌀80 mm

AL9222 (1..6) IP67 ⌀44 mm

AL9231 (1..11) IP67 ⌀85 mm

AL9240 (1..25) IP67 ⌀85 mm

dimmable

AL5012 (1..4) IP20 DALI 2 PUSH 0/1..10V ⌀45 mm

AL5241 (1..16) IP20 DALI 2 PUSH ⌀70 mm

AL8012 (1..4) IP67 DALI 2 ⌀48 mm

dimming module

AL7035 IP20 DALI 2 PUSH 0/1..10V ⌀44 mm

Note: Dimming module AL7035 to be used in combination with a 24VDC power supply.