

CORE 20

Recessed optic downlights

design Lapo Grassellini



The Core range of recessed fixtures matches utmost performance to incredible compactness. Recessed optics guarantees high viewing comfort. Revolutionary in dissipative, functional design, it offers the possibility to combine colour temperatures and beam angles in CRI85 and CRI93 versions.

La gamma di incassi Core combina altissime prestazioni ad una dimensione incredibilmente contenuta. L'ottica arretrata garantisce un alto comfort visivo. Rivoluzionari per il design funzionale alla dissipazione, offrono la possibilità di combinare temperature colore ed aperture di fascio nelle versioni a CRI85 ed a CRI93.

La gamme d'encastrables Core associe prestations très élevées et dimension incroyablement contenue. L'optique en retrait garantit un confort visuel élevé. Révolutionnaires pour le design fonctionnel à la dissipation, ils offrent la possibilité d'associer températures, couleur et ouvertures de faisceau dans les versions à CRI85 et à CRI93.



IP44 made in Italy

Die Produktreihe von Einbauleuchten Core kombiniert beste Leistungen mit einer unglaublich kompakten Größe. Die Einbauoptik garantiert einen hohen visuellen Komfort. Revolutionär durch ihr funktionales Design zur Ableitung, bietet sie die Möglichkeit, Farbtemperaturen und Strahlenbündel in den Versionen CRI85 und CRI93 zu kombinieren.

La gama de empotrados Core combina elevadísimas prestaciones con un tamaño increíblemente reducido. La óptica retrocedida garantiza un alto confort visual. Revolucionarios por su diseño centrado en la disipación, ofrecen la posibilidad de combinar temperaturas de color y aberturas de haz en las versiones de CRI85 y de CRI93.

Supply current

500mA (V_f 36V)

Power


20W

CRI


85-93

2-Step MacAdam

Dimensions

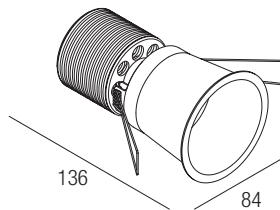

Photometric diagrams

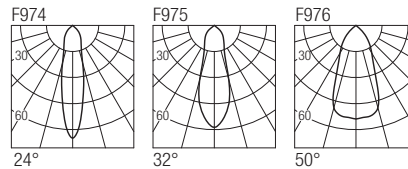


CCT/CRI/Flux

CCT	CRI85	CRI93
2700K	1830lm	1700lm
3000K	2000lm	1830lm
4000K	2100lm	1950lm

Code construction

C2 X X X X

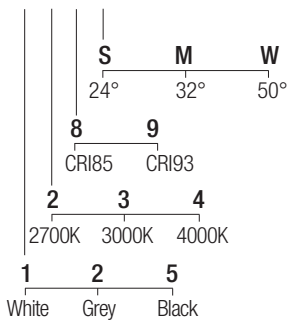

Accessories

LOH2 LOH2B LOH2G

White Black Grey

Low luminance louver



SC201

Milky screen



Note: The screen must be ordered together with the lighting fixture.

Drivers 500mA

on/off

AL1084 (1) IP20 S.P. ⌀55 mm

dimnable

AL4010 (1) IP20 PUSH 0/1..10V ⌀72 mm

ALB451 (1) IP20 DALI 2 PUSH ⌀46 mm

AL4151 (1) IP20 DALI 2 ⌀72 mm

AL4153 (1) IP20 PUSH IGBT-TRIAC ⌀56 mm