


DIG DTW

Dim to Warm uplights

design Rod&Todd



IP67 Dim to Warm ground recessed luminaire of the highest quality construction with small dimensions, high luminous fluxes with precise and clean optics, able to offer narrow beam angles. Body made of thick anodised aluminium, versions with carriageable, anodised, powder-coated aluminium front in stainless steel. Extra-clear tempered glass, ATEX cable gland, neoprene cable.

Incasto a terra IP67 Dim to Warm di altissima qualità costruttiva con dimensioni contenute, elevati flussi luminosi ad ottiche precise e pulite, in grado di offrire aperture di fascio strette. Corpo in alluminio anodizzato a spessore, versioni con frontale in acciaio INOX carrabili, in alluminio anodizzato e verniciato a polveri calpestabili. Vetro extrachiaro temperato, pressacavo ATEX, cavo in neoprene.

Appareil à encastrer au sol IP67 Dim to Warm de la plus haute qualité de construction, avec des dimensions réduites, des flux lumineux élevés et une optique précise et propre, en mesure d'offrir des angles de rayonnement étroits. Corps en aluminium anodisé épais, versions avec façade en aluminium anodisé et peint par poudrage en acier inoxydable. Verre trempé extra-clair, presse-étoupe ATEX, câble en néoprène.

Bodeneinbauleuchte IP67 Dim to Warm von höchster Qualität, mit geringen Abmessungen, hohen Lichtströmen und einer präzisen und sauberen Optik, die einen engen Ausstrahlungswinkel bietet. Gehäuse aus dickem, eloxiertem Aluminium, Versionen mit fahrbarer, eloxierter, pulverbeschichteter Aluminiumfront in Edelstahl. Extra klares, gehärtetes Glas, ATEX-Kabelverschraubung, Neoprenkabel.

IP67 made in Italy



Supply current
400mA (V, 18V)


Power
8W

Series wiring


CRI
95

DTW 3000K to 1800K

Dimensions



Photometric diagrams

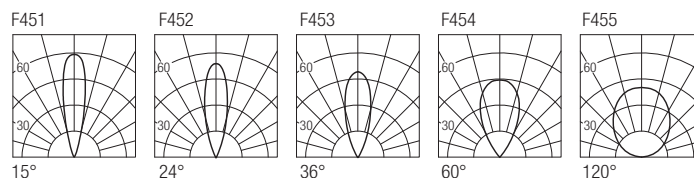


CCT/CRI/Flux

3000K	1800K
870lm	16lm

Code construction


DTWDIG1 X X X

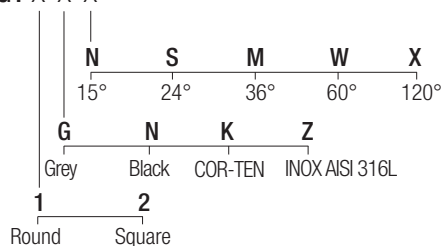

Note: Made-to-measure cable available on request.

Accessories

CSXJ01
Recessing box



LDDIG101
Low luminance louver



Note: The filter must be ordered together with the lighting fixture.

Drivers 400mA

dimmmable
AL4451 (1..2) IP20 DALI 2 50 mm
AL8040 (1..2) IP67 DALI 2 48 mm