


ELLE 6

Bollards

design Roberto Mantovani



The Elle range proposes IP65-rated, double powder-coated aluminium bollards with light emission completely confined to the lower hemisphere in full compliance with the most stringent anti-light pollution standards. With minimal design, Elle is ideal for the lighting of pathways in residential environments and hotel grounds.

La gamma Elle offre bollards IP65 in alluminio trattato con doppia verniciatura a polveri, con emissione luminosa completamente contenuta nell'emisfero inferiore, in piena rispondenza alle più stringenti normative anti inquinamento luminoso. Di disegno minimale, Elle si presta ad illuminazioni di percorsi in ambiti residenziali e ricettivi.

La gamme Elle propose des bollards IP65 en aluminium traité avec double peinture en poudre, avec émission lumineuse complètement contenue dans l'hémisphère inférieure, en totale conformité avec les réglementations anti-pollution lumineuse les plus strictes. Avec un design minimaliste, Elle se prête à des éclairages de parcours dans des milieux résidentiels et de réception.

Die Produktreihe Elle bietet Pollerleuchten mit Schutzklasse IP65 aus behandeltem Aluminium mit Doppelpulverbeschichtung, mit komplett kompakten Lichtstrahlen in der unteren Hemisphäre, unter absoluter Beachtung der strengen Vorschriften gegen Lichtverschmutzung. Mit minimalistischem Design bietet Elle Beleuchtungen von Wegen in Wohnanlagen und Beherbergungsbetrieben.

CE  IP65 made in Italy

La gama Elle ofrece bolaros IP65 de aluminio tratado con doble barnizado en polvo, con emisión luminosa totalmente contenida en el hemisferio inferior, conforme con las más estrictas normas anticontaminación lumínica. De diseño minimalista, Elle es ideal para iluminar itinerarios en áreas residenciales y hosteleras.

Supply current

350-500mA (V_r 8,7V)

Power

3-6W


Series wiring

CRI


85

2-Step MacAdam

Dimensions



Photometric diagrams




CCT/CRI/Flux

	350mA	500mA
2700K	267lm	384lm
3000K	279lm	400lm
4200K	309lm	462lm
6000K	342lm	495lm

Code construction

Note: Made-to-measure cable available on request.


BLP X X X

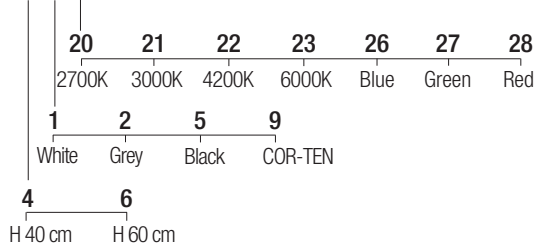

Accessories

ZC001

Anchor bolt for concrete plinth



Drivers 350mA

on/off

- AL1034 (1..3) IP20 ⌀ 30 mm
- AL1035 (1..3) IP20 ⌀ 40 mm
- AL1037 (1..5) IP20 S.P. ⌀ 55 mm
- AL9011 (1..4) IP67 ⌀ 44 mm

dimmmable

- AL4000 (1..4) IP20 PUSH 0/1..10V ⌀ 72 mm
- ALD435 (1..3) IP20 DALI 2 PUSH ⌀ 36 mm
- AL4051 (1..4) IP20 DALI 2 ⌀ 72 mm
- AL4053 (1..4) IP20 PUSH IGBT-TRIAC ⌀ 56 mm
- AL6035 (1..3) IP67 DALI 2 ⌀ 44 mm
- AL8035 (2..4) IP67 DALI 2 ⌀ 48 mm

Drivers 500mA

on/off

- AL1074 (1..2) IP20 ⌀ 30 mm
- AL1077 (1..2) IP20 ⌀ 40 mm
- AL1084 (1..3) IP20 S.P. ⌀ 55 mm
- AL9051 (1..3) IP67 ⌀ 44 mm

dimmmable

- AL4010 (1..4) IP20 PUSH 0/1..10V ⌀ 72 mm
- ALD450 (1..2) IP20 DALI 2 PUSH ⌀ 36 mm
- AL4151 (1..4) IP20 DALI 2 ⌀ 72 mm
- AL4153 (1..4) IP20 PUSH IGBT-TRIAC ⌀ 56 mm
- AL6050 (1..2) IP67 DALI 2 ⌀ 44 mm
- AL8050 (2..4) IP67 DALI 2 ⌀ 48 mm