

ESME PERFORMANCE 10

Flush optic downlight

design Jude Allen

Recessed linear luminaire combining luminous efficiency and extremely precise optics for general and accent lighting applications.

Apparecchio lineare da incasso che combina efficienza luminosa ed ottiche estremamente precise, per applicazioni di illuminazione generale e d'accento.

Luminaire linéaire encastré combinant efficacité lumineuse et optique extrêmement précise pour les applications d'éclairage général et d'accentuation.

Lineare Einbauleuchte mit hoher Lichtausbeute und extrem präziser Optik für die Allgemein- und Akzentbeleuchtung.

Luminaria lineal empotrable que combina eficiencia luminosa y una óptica extremadamente precisa para aplicaciones de iluminación general y de acento.



IP20 made in Italy



Supply current

24VDC

Power


10W

CRI


95

3-Step MacAdam

Dimensions




Photometric diagrams

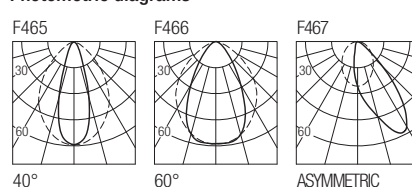

CCT/CRI/Flux

2700K	825lm
3000K	865lm
4000K	985lm

Code construction

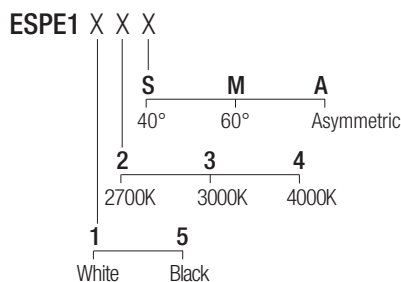

Drivers 24VDC

on/off

AL2124 (1) IP20 d: 132x22x19(h) mm

AL2012 (1..2) IP20 d: 146x55x19(h) mm

AL2031 (1..7) IP20 d: 255x60x36(h) mm

AL2040 (1..15) IP20 d: 240x60x49(h) mm

dimnable

AL5012 (1..2) IP20 DALI 2 PUSH 0/1..10V d: 150x38x24,5(h) mm

AL5241 (3..10) IP20 DALI 2 PUSH d: 190x65x22(h) mm