

### GAGARIN PS6

Pendants

design Roberto Mantovani



A suspended luminaire for ceiling installation, characterised by a minimal design and high optical performance. It lends itself to applications ranging from accent lighting to general illumination, giving the chance to combine various color temperatures and beam angles, with CRI98 and R9 93. Can be fitted with an anti-glare filter for maximum visual comfort.

Apparecchio sospeso per installazione a soffitto connotato da un design minimale ed elevate prestazioni ottiche. Si presta ad applicazioni che vanno dalla luce d'accento all'illuminazione generale. Offre la possibilità di combinare temperature colore ed aperture di fascio, con CRI98 ed R9 93. Equipaggiabile con l'accessorio filtro antiabbagliamento, per assicurare il miglior comfort visivo dell'installazione.

Luminaire suspendu pour installation semi-encastrée, caractérisé par un design minimalist et de hautes performances optiques. Il est indiqué pour les applications allant de l'éclairage d'accentuation à l'éclairage général. Il offre la possibilité de combiner les températures de couleur et les angles de faisceau, avec CRI98 et R9 93. Disponibilité dans les accessoires du filtre anti-éblouissement pour le meilleur confort visuel.

Abgehängte Leuchte für die Deckenmontage mit minimalistischem Design und hoher optischer Leistung. Eignet sie sich für Anwendungen von der Akzentbeleuchtung bis zur Allgemeinbeleuchtung und bietet die Möglichkeit, verschiedene Farbtemperaturen und Abstrahlwinkel mit CRI98 und R9 93 zu kombinieren. Sie kann mit einem Blendschutzfilter für maximalen Sehkomfort ausgestattet werden.

Aparato colgante para instalación de techo caracterizado por un diseño minimalista y un alto rendimiento óptico. Se presta a aplicaciones que van desde la iluminación de acento hasta la iluminación general, dando la oportunidad de combinar varias temperaturas de color y ángulos de haz, con CRI98 y R9 93. Puede ser equipado con un filtro antideslumbrante para el máximo confort visual.



IP20 made in Italy

#### Supply current

230VAC

#### Power


6W

#### CRI


98

#### 2-Step MacAdam

#### Dimensions

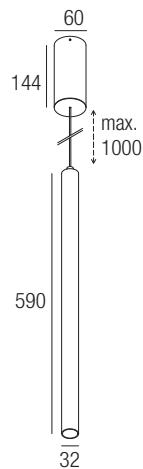

#### Photometric diagrams

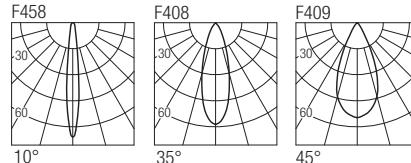


#### CCT/CRI/Flux

2200K	490 lm
2700K	540 lm
3000K	600 lm
4000K	620 lm

#### Code construction

GPS6 X X X



Note: Made-to-measure cable available on request.

#### Accessories

LJ02      LJ02B  
White      Black  
Low luminance louver



SJ02      SJ02B  
White      Black  
Milky screen



**Note:** The filter and screen are not compatible with the 10° lens versions.