


## JOS R10

Semi-recessed projectors

design Roberto Mantovani

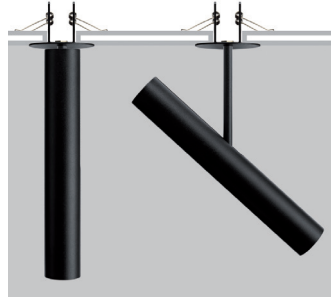

A projector for semi-recessed wall or ceiling installations, it is characterised by a minimal design and high optical performance. It lends itself to applications ranging from accent lighting to general illumination. Also available in a version with 10°-55° adjustable lens.

Proiettore per installazione a semi-incasso a parete o a soffitto connotato da un design minimale ed elevate prestazioni ottiche. Si presta ad applicazioni che vanno dalla luce d'accento all'illuminazione generale. Disponibile anche in versione ad ottica regolabile 10°-55°.

Projecteur pour installation semi-encastrée sur mur ou sur plafond, caractérisé par un design minimaliste et de hautes performances optiques. Il est indiqué pour les applications allant de l'éclairage d'accentuation à l'éclairage général. Disponible aussi en version à optique réglable 10°-55°.



IP20 made in Italy

Projektor für halbversenkte Wand- oder Deckenmontage mit minimalistischem Design und hoher optischer Leistung. Eignet sich für Anwendungen, die von der Akzentbeleuchtung bis zur Allgemeinbeleuchtung reichen. Auch in der Version mit 10°-55° verstellbarer Optik erhältlich.

Proyector para instalación semi-empotrado en pared o techo caracterizado por un diseño minimalista y un alto rendimiento óptico. Se presta a aplicaciones que van desde la iluminación de acento hasta la iluminación general. También disponible en versión de óptica ajustable de 10°-55°.

**Supply current**  
500mA (V<sub>i</sub> 18V)


**Power**  
10W

**Series wiring**


**CRI**  
85-93

**2-Step MacAdam**

### Dimensions

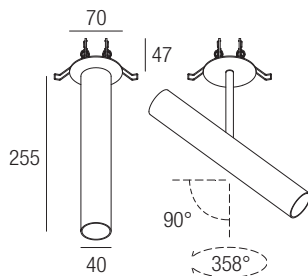


### Photometric diagrams

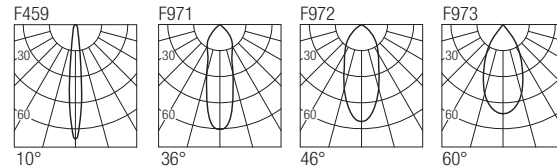

### CCT/CRI/Flux

	CRI85	CRI93
2700K	890lm	840lm
3000K	1000lm	930lm
4000K	1040lm	960lm

### Code construction

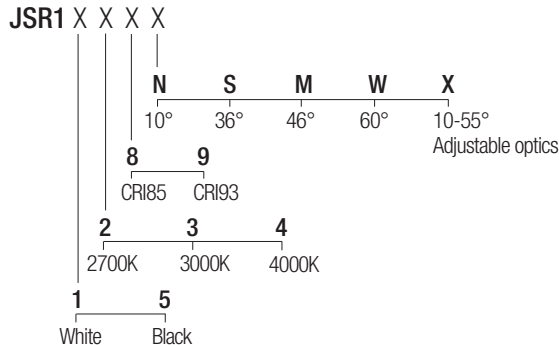

**Note:** Versions with extended arm length are available upon request.

### Accessories

**LJ01 LJ01B**

White Black

Low luminance louver



**SJ01 SJ01B**

White Black

Milky screen



**Note:** The filter and screen are not compatible with the 10° and adjustable 10-55° lens versions.

### AL7022

24VDC/500mA constant current converter

### Drivers 500mA

on/off

**AL1074** (1) IP20 ⌀30 mm

**AL1077** (1) IP20 ⌀40 mm

**AL1084** (1..2) IP20 S.P. ⌀55 mm

dimnable

**AL4010** (1..2) IP20 PUSH 0/1..10V ⌀72 mm

**ALD450** (1) IP20 DALI 2 PUSH ⌀36 mm

**AL4151** (1..2) IP20 DALI 2 ⌀72 mm

**AL4153** (1..2) IP20 PUSH IGBT-TRIAC ⌀56 mm