

JOS T6P

Pendant projector for 24VDC tracks

design Roberto Mantovani



A suspended projector module for 24VDC track, characterized by a minimal design and high optical performance. It lends itself to accent or general lighting applications, giving the chance to combine various color temperatures and beam angles, with CRI98 and R9 93. Can be fitted with an anti-glare filter for maximum visual comfort.

Modulo proiettore sospeso per binario 24VDC, connotato da un design minimale ed elevate prestazioni ottiche, si presta ad applicazioni che vanno dalla luce d'accento all'illuminazione generale. Offre la possibilità di combinare temperature colore ed aperture di fascio, con CRI98 ed R9 93. Equipaggiabile con l'accessorio filtro antibrillamento, per assicurare il miglior comfort visivo dell'installazione.

Un module projecteur suspendu pour rail 24VDC, caractérisé par un design minimalist et des performances optiques élevées. Il se prête à des applications d'éclairage d'accentuation ou général, offrant la possibilité de combiner différentes températures de couleur et angles de faisceau, avec CRI98 et R9 93. Peut être équipé d'un filtre anti-éblouissement pour un confort visuel maximal.

Ein Abgehängter Projektor für 24VDC-Stromschienen, das sich durch ein minimalistisches Design und eine hohe optische Leistung auszeichnet. Es eignet sich für Akzent- oder Allgemeinbeleuchtung und bietet die Möglichkeit, verschiedene Farbtemperaturen und Abstrahlwinkel mit CRI98 und R9 93 zu kombinieren. Kann mit einem Blendschutzfilter für maximalen Sehkomfort ausgestattet werden.

Un módulo proyector colgante para carril 24VDC, caracterizado por un diseño minimalista y un alto rendimiento óptico. Se presta a aplicaciones de iluminación general o de acento, dando la posibilidad de combinar varias temperaturas de color y ángulos de haz, con CRI98 y R9 93. Puede equiparse con un filtro antideslumbrante para un máximo confort visual.



IP20 made in Italy

Supply current

24VDC

Power


6W

CRI


98

2-Step MacAdam

Dimensions

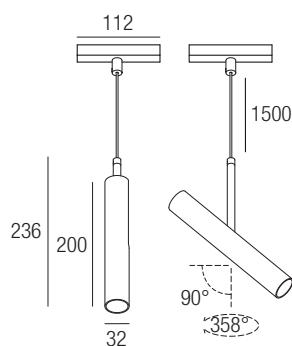

Photometric diagrams

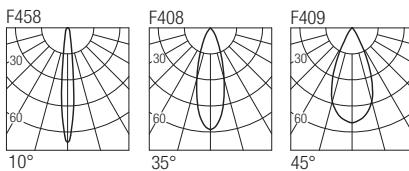


CCT/CRI/Flux

2200K	490 lm
2700K	540 lm
3000K	600 lm
4000K	620 lm

Code construction

JST6P X X X

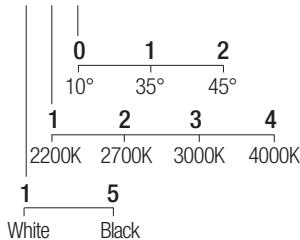

Note: Made-to-measure cable available on request.

Accessories

LJ02 LJ02B

White Black



Low luminance louver

SJ02 SJ02B

White Black



Milky screen

Note: The filter and screen are not compatible with the 10° lens versions.