


## LAD R10 WALL WASHER

Semi-recessed projectors

design Roberto Mantovani



A projector for semi-recessed wall or ceiling installations, it is characterised by a minimal design and high optical performance. The wall washer optics are extremely precise and clean, whilst the geometry of the body eliminates visibility of the light source, ensuring extremely high visual comfort.

Proiettore per installazione a semi-incasso a parete o a soffitto connotato da un design minimale ed elevate prestazioni ottiche. L'ottica wall washer è estremamente precisa e pulita, la geometria del corpo annulla la visibilità della sorgente luminosa rendendo il comfort visivo estremamente elevato.

Projecteur pour installation semi-encastrée sur mur ou sur plafond, caractérisé par un design minimaliste et de hautes performances optiques. L'optique wallwasher est extrêmement précise et nette, la géométrie du corps dissimule la source lumineuse, pour un confort visuel extrêmement élevé.



IP20 made in Italy

Projektor für halbversenkte Wand- oder Deckenmontage mit minimalistischem Design und hoher optischer Leistung. Die Wallwasher-Optik ist extrem präzise und sauber, die Geometrie des Körpers hebt die Sichtbarkeit der Lichtquelle auf, wodurch der Sehkomfort extrem hoch ist.

Proyector para instalación semi-emprotrado en pared o techo caracterizado por un diseño minimalista y un alto rendimiento óptico. La óptica wall washer es extremadamente precisa y limpia, la geometría del cuerpo anula la visibilidad de la fuente luminosa haciendo que el confort visual sea extremadamente alto.

### Supply current

500mA (V<sub>r</sub> 18V)

### Power

10W


### Series wiring

### CRI


85-93

### 2-Step MacAdam

### Dimensions




### Photometric diagrams




### CCT/CRI/Flux

	CRI85	CRI93
2700K	890lm	840lm
3000K	1000lm	930lm
4000K	1040lm	960lm

### Code construction



### Installation guide

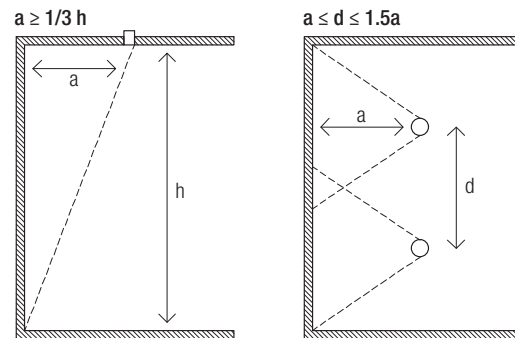

Note: Versions with extended arm length are available upon request.

### Accessories

#### AL7022

24VDC/500mA constant current converter

### Drivers 500mA

on/off

AL1074 (1) IP20 ⌀ 30 mm

AL1077 (1) IP20 ⌀ 40 mm

AL1084 (1..2) IP20 S.P. ⌀ 55 mm

dimmmable

AL4010 (1..2) IP20 PUSH 0/1..10V ⌀ 72 mm

ALD450 (1) IP20 DALI 2 PUSH ⌀ 36 mm

AL4151 (1..2) IP20 DALI 2 ⌀ 72 mm

AL4153 (1..2) IP20 PUSH IGBT-TRIAC ⌀ 56 mm