

LEV S7

Ceiling mounted luminaires

design Roberto Mantovani



A linear module that combines luminous efficiency and extremely precise optics for general and accent lighting applications.

Modulo lineare che combina efficienza luminosa ed ottiche estremamente precise, per applicazioni di illuminazione generale e d'accento.

Module linéaire que allie efficacité lumineuse et optiques d'une extrême précision, pour applications d'éclairage général et d'accentuation.

Linearmodul, das extrem präzise Lichtausbeute und Optik kombiniert, für Anwendungen in der Allgemein- und Akzentbeleuchtung.

Módulo lineal que combina una eficiencia luminosa y óptica extremadamente precisa, para aplicaciones de iluminación general y de acento.



IP20 made in Italy

Supply current

24VDC

Power


7W

CRI


85-93

2-Step MacAdam

Dimensions




Photometric diagrams

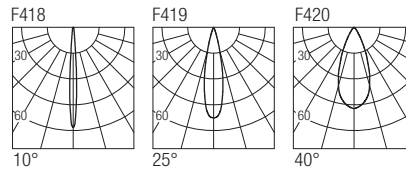

CCT/CRI/Flux

2700K	623 lm
3000K	651 lm
4200K	721 lm

Code construction



Drivers 24VDC

on/off

AL2124 (1) IP20 ⌀ 28 mm

AL2012 (1..3) IP20 ⌀ 60 mm

AL2031 (1..10) IP20 ⌀ 70 mm

AL2040 (1..21) IP20 ⌀ 80 mm

dimmable

AL5012 (1..3) IP20 DALI 2 PUSH 0/1..10V ⌀ 45 mm

AL5241 (1..14) IP20 DALI 2 PUSH ⌀ 70 mm

dimming module

AL7035 IP20 DALI 2 PUSH 0/1..10V ⌀ 44 mm

Note: Dimming module AL7035 to be used in combination with a 24VDC power supply.