

## MAUNA 724 SPIKE

IP rated projectors

design Roberto Mantovani



IP65 projectors equipped with COB LEDs with CRI85 or CRI93, offering a wide range of beam angles for precise and effective lighting effects. Suitable for installation in particularly aggressive environments. Optical quality and fine finishes combine in a product of great reliability and quality.

Proiettori IP65 equipaggiati con COB LED con CRI85 o CRI93, in grado di offrire un'ampia gamma di aperture di fascio per effetti luminosi precisi ed efficaci. Ideali per l'installazione in ambienti particolarmente aggressivi. Qualità ottica e finiture di pregio si fondono in un prodotto di grande affidabilità e qualità.

Projecteurs IP65 équipés de LED COB avec CRI85 ou CRI93, offrant une large gamme d'angles de rayonnement pour des effets lumineux précis et efficaces. Convient pour une installation dans des environnements particulièrement agressifs. La qualité optique et les finitions soignées se combinent dans un produit de grande fiabilité et qualité.

IP65-Projektoren, ausgestattet mit COB-LEDs mit CRI85 oder CRI93, die eine breite Palette von Abstrahlwinkeln für präzise und effektive Lichteffekte bieten. Geeignet für die Installation in besonders aggressiven Umgebungen. Optische Qualität und hochwertige Verarbeitung verbinden sich zu einem Produkt von hoher Zuverlässigkeit und Qualität.

Proyectors IP65 equipados con LED COB con CRI85 o CRI93, que ofrecen una amplia gama de ángulos de haz para efectos de iluminación precisos y eficaces. Adecuados para su instalación en entornos especialmente agresivos. La calidad óptica y los finos acabados se combinan en un producto de gran fiabilidad y calidad.



IP65 made in Italy

Supply current  
24VDC


Power  
7W

Parallel wiring


CRI  
85-93  
(2700K-3000K-4000K only)

2-Step MacAdam

Dimensions

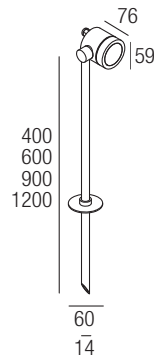


Photometric diagrams

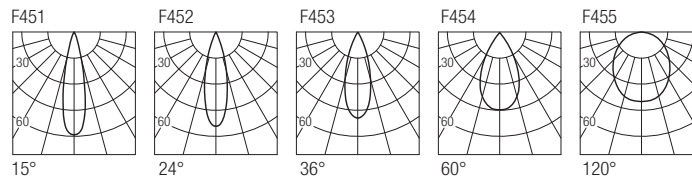

CCT/CRI/Flux

CCT	CRI85	CRI93
2200K	570lm	
2700K	630lm	590lm
3000K	700lm	650lm
4000K	730lm	670lm

Code construction

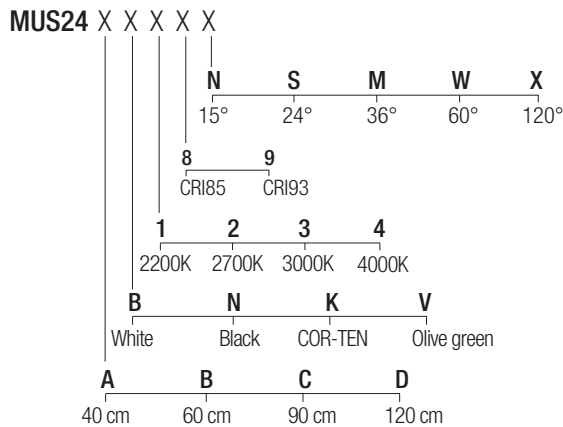

Note: Made-to-measure cable available on request.

Accessories

LMUS2401

Low luminance louver



Note: The filter must be ordered together with the lighting fixture.

XNTX20B XNTX20N XNTX20K XNTX20V

White Black COR-TEN Olive green

Antiglare snoot



Drivers 24VDC

on/off

AL2124 (1) IP20 ⌀ 28 mm

AL2012 (1..3) IP20 ⌀ 60 mm

AL2031 (1..10) IP20 ⌀ 70 mm

AL2040 (1..21) IP20 ⌀ 80 mm

AL9222 (1..5) IP67 ⌀ 44 mm

AL9231 (1..10) IP67 ⌀ 85 mm

AL9240 (1..21) IP67 ⌀ 85 mm

dimmable

AL5012 (1..3) IP20 DALI 2 PUSH 0/1..10V ⌀ 45 mm

AL5241 (3..14) IP20 DALI 2 PUSH ⌀ 70 mm

AL8012 (1..3) IP67 DALI 2 ⌀ 48 mm

dimming module

AL7035 IP20 DALI 2 PUSH 0/1..10V ⌀ 44 mm

Note: Dimming module AL7035 to be used in combination with a 24VDC power supply.