FLEXA
LIGHTING

MINIJOS B120

Surface projector

IP20 made in Italy

design Roberto Mantovani



A projector for wall or ceiling installation, equipped with an integrated on/off or dimmable driver, combining a clean, sophisticated design with high optical performance. Ideal for applications ranging from accent to general lighting, it integrates discreetly into the architecture, enhancing the space through precise, controlled and high-quality light.

Proiettore per installazione a parete o a soffitto, dotato di driver integrato on/off o dimmerabile, che combina un design essenziale e sofisticato ed elevate prestazioni ottiche. Ideale per applicazioni che spaziano dalla luce d'accento all'illuminazione generale, si integra con discrezione nell'architettura, valorizzando lo spazio attraverso una luce precisa, controllata e di elevata qualità.

Un projecteur pour installation murale ou au plafond, équipé d'un driver intégré on/off ou dimmable, associant un design épuré et sophistiqué à des performances optiques élevées. Idéal pour des applications allant de l'éclairage d'accentuation à l'éclairage général, il s'intègre discrètement dans l'architecture et valorise l'espace grâce à une lumière précise, maîtrisée et de haute qualité.

Ein Strahler für die Wand- oder Deckenmontage mit integriertem On/Off- oder dimmbarem Treiber, der ein klares und anspruchsvolles Design mit hoher optischer Leistung verbindet. Er eignet sich ideal für Anwendungen von der Akzent- bis zur Allgemeinbeleuchtung, integriert sich dezent in die Architektur und wertet den Raum durch präzises, kontrolliertes und hochwertiges Licht auf.

Un proyector para instalación en pared o techo, equipado con driver integrado on/off o regulable, que combina un diseño limpio y sofisticado con elevadas prestaciones ópticas. Ideal para aplicaciones que abarcan desde la iluminación de acento hasta la iluminación general, se integra discretamente en la arquitectura, realzando el espacio mediante una luz precisa, controlada y de alta calidad.


Supply current
230VAC

Power
2x10W


CRI
85 (2200K)
93 (2700K-3000K-4000K)

2-Step MacAdam

Dimensions



Photometric diagrams

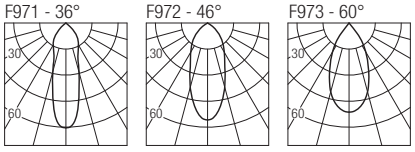

CCT/CRI/Flux

2200K	**2 x 810 lm**
2700K	**2 x 840 lm**
3000K	**2 x 930 lm**
4000K	**2 x 960 lm**

Code construction

MJSB12 X X X X

			ON	On/off
			TR	IGBT-TRIAC
			DL	DALI-PUSH
			AD	1..10V
		S	**M**	**W**
		36°	46°	60°
	1	**2**	**3**	**4**
	2200K	2700K	3000K	4000K
1	**5**			
White	Black			

Accessories

LJ01X2 White (2pcs)
LJ01BX2 Black (2pcs)
Low luminance louver

SJ01X2 White (2pcs)
SJ01BX2 Black (2pcs)
Milky screen