


MOON Q20

Trimless downlights

design Lapo Grassellini

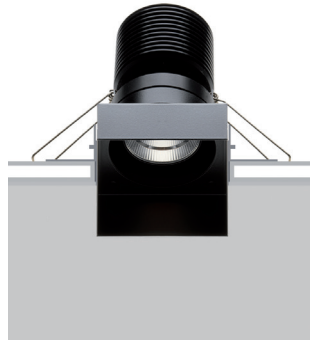

The Moon range of trimless, recessed fixtures matches utmost performance to incredible compactness. Recessed optics guarantees high viewing comfort. Revolutionary in dissipative, functional design, it offers the possibility to combine colour temperatures and beam angles in CRI85 and CRI93 versions.

La gamma di incassi trimless Moon combina altissime prestazioni ad una dimensione incredibilmente contenuta. L'ottica arretrata garantisce un alto comfort visivo. Rivoluzionari per il design funzionale alla dissipazione, offrono la possibilità di combinare temperature colore ed aperture di fascio nelle versioni a CRI85 ed a CRI93.

La gamme d'encastrables trimless Moon associe prestations très élevées et dimension incroyablement contenue. L'optique en retrait garantit un confort visuel élevé. Révolutionnaires pour le design fonctionnel à la dissipation, ils offrent la possibilité d'associer températures, couleur et ouvertures de faisceau dans les versions à CRI85 et à CRI93.

Die Produktreihe von Einbauleuchten trimless Moon kombiniert beste Leistungen mit einer unglaublich kompakten Größe. Die Einbauroptik garantiert einen hohen visuellen Komfort. Revolutionär durch ihr funktionales Design zur Ableitung, bietet sie die Möglichkeit, Farbtemperaturen und Strahlenbündel in den Versionen CRI85 und CRI93 zu kombinieren.

CE IP44 made in Italy


Supply current
500mA (V_i 36V)

Power
20W


CRI
85-93

2-Step MacAdam

Dimensions

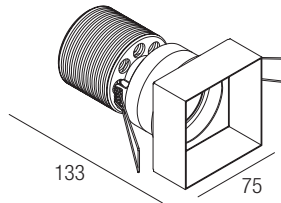

Photometric diagrams

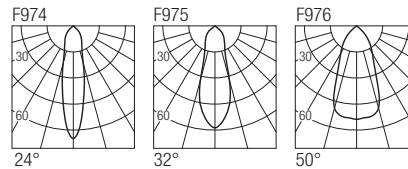


CCT/CRI/Flux

	CRI85	CRI93
2700K	1830lm	1700lm
3000K	2000lm	1830lm
4000K	2100lm	1950lm

Code construction


MQ2 X X X X

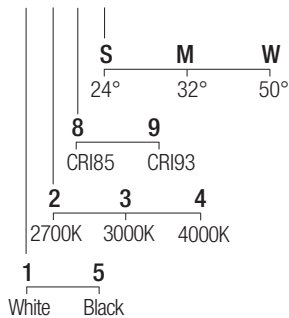

Accessories

MQC004 **MQC004B**
White Black

Plasterboard recessing frame



LOH2 **LOH2B**
White Black

Low luminance louver



SMQ201

Milky screen



Note: The screen must be ordered together with the lighting fixture.

Drivers 500mA

on/off

AL1084 (1) IP20 S.P. ⌀ 55 mm

dimmmable

AL4010 (1) IP20 PUSH 0/1...10V ⌀ 72 mm

ALB451 (1) IP20 DALI 2 PUSH ⌀ 46 mm

AL4151 (1) IP20 DALI 2 ⌀ 72 mm

AL4153 (1) IP20 PUSH IGBT-TRIAC ⌀ 56 mm