


RENÉ

IP rated projectors

design Roberto Mantovani



IP65 projectors equipped with COB LEDs, offering a wide range of beam angles for precise and effective lighting effects. Suitable for installation in particularly aggressive environments. Optical quality and fine finishes combine in a product of great reliability and quality.

Proiettori IP65 equipaggiati con COB LED, in grado di offrire un'ampia gamma di aperture di fascio per effetti luminosi precisi ed efficaci. Ideali per l'installazione in ambienti particolarmente aggressivi. Qualità ottica e finiture di pregio si fondono in un prodotto di grande affidabilità e qualità.

Projecteurs IP65 équipés de LED COB, offrant une large gamme d'angles de rayonnement pour des effets d'éclairage précis et efficaces. Convient pour une installation dans des environnements particulièrement agressifs. La qualité optique et les finitions soignées se combinent dans un produit de grande fiabilité et de qualité.

IP65-Projektoren, ausgestattet mit COB-LEDs, die eine breite Palette von Abstrahlwinkeln für präzise und effektive Lichteffekte bieten. Geeignet für die Installation in besonders aggressiven Umgebungen. Optische Qualität und hochwertige Verarbeitung verbinden sich zu einem Produkt von hoher Zuverlässigkeit und Qualität.

Proyectors IP65 equipados con LED COB, que ofrecen una amplia gama de ángulos de haz para efectos de iluminación precisos y eficaces. Adecuados para su instalación en entornos especialmente agresivos. La calidad óptica y los finos acabados se combinan en un producto de gran fiabilidad y calidad.



IP65 made in Italy

Supply current
350-500mA (V_i 18V)


Power
7-10W

Series wiring


CRI
85 (2200K)
93 (2700K-3000K-4000K)

2-Step MacAdam

Dimensions

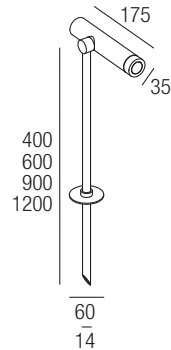


Photometric diagrams

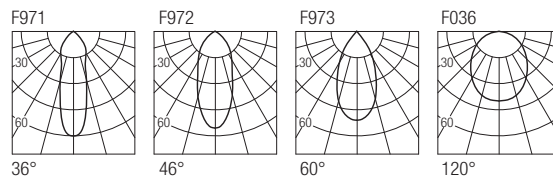

CCT/CRI/Flux

	350mA	500mA
2200K	530lm	760lm
2700K	590lm	840lm
3000K	650lm	930lm
4000K	670lm	960lm

Code construction

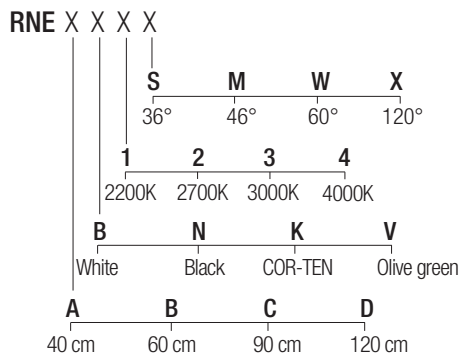

Note: Made-to-measure cable available on request.

Accessories

LRN01

Low luminance louver



Note: The filter must be ordered together with the lighting fixture.

Drivers 350mA

on/off
AL1034 (1..2) IP20 ⌀30 mm
AL1035 (1..2) IP20 ⌀40 mm
AL1037 (1..2) IP20 S.P. ⌀55 mm
AL9011 (1..2) IP67 ⌀44 mm

dimmmable
AL4000 (1..2) IP20 PUSH 0/1..10V ⌀72 mm
ALD435 (1..1) IP20 DALI 2 PUSH ⌀36 mm
AL4051 (1..2) IP20 DALI 2 ⌀72 mm
AL4053 (1..2) IP20 PUSH IGBT-TRIAC ⌀56 mm
AL6035 (1) IP67 DALI 2 ⌀44 mm
AL8035 (1..2) IP67 DALI 2 ⌀48 mm

Drivers 500mA

on/off
AL1074 (1) IP20 ⌀30 mm
AL1077 (1) IP20 ⌀40 mm
AL1084 (1..2) IP20 S.P. ⌀55 mm
AL9051 (1..2) IP67 ⌀44 mm

dimmmable
AL4010 (1..2) IP20 PUSH 0/1..10V ⌀72 mm
ALD450 (1) IP20 DALI 2 PUSH ⌀36 mm
AL4151 (1..2) IP20 DALI 2 ⌀72 mm
AL4153 (1..2) IP20 PUSH IGBT-TRIAC ⌀56 mm
AL6050 (1) IP67 DALI 2 ⌀44 mm
AL8050 (1..2) IP67 DALI 2 ⌀48 mm