FLEXA
LIGHTING

RINGO

Ceiling mounted luminaire

IP20 made in Italy

design Roberto Mantovani



The Ringo range of surface-mounted luminaires, equipped with an integrated on/off or dimmable driver, combines high optical performance with a clean, sophisticated design. Designed for applications ranging from accent to general lighting, it integrates discreetly into the architecture, enhancing the space through precise, controlled and high-quality light.

La gamma di apparecchi a plafone Ringo, dotata di driver integrato on/off o dimmerabile, combina elevate prestazioni ottiche con un design essenziale e sofisticato. Pensata per applicazioni che spaziano dalla luce d'accento all'illuminazione generale, si integra con discrezione nell'architettura, valorizzando lo spazio attraverso una luce precisa, controllata e di elevata qualità.

La gamme de luminaires en saillie Ringo, équipée d'un driver intégré on/off ou dimmable, associe des performances optiques élevées à un design épuré et sophistiqué. Conçue pour des applications allant de l'éclairage d'accentuation à l'éclairage général, elle s'intègre discrètement dans l'architecture et valorise l'espace grâce à une lumière précise, maîtrisée et de haute qualité.

Die Serie Ringo umfasst Aufbauleuchten mit integriertem On/Off- oder dimmbarem Treiber und verbindet hohe optische Leistung mit einem klaren, anspruchsvollen Design. Für Anwendungen von der Akzent- bis zur Allgemeinbeleuchtung konzipiert, integriert sie sich dezent in die Architektur und wertet den Raum durch präzises, kontrolliertes und hochwertiges Licht auf.

La gama de luminarias de superficie Ringo, equipada con driver integrado on/off o regulable, combina elevadas prestaciones ópticas con un diseño limpio y sofisticado. Pensada para aplicaciones que abarcan desde la iluminación de acento hasta la iluminación general, se integra discretamente en la arquitectura, realzando el espacio mediante una luz precisa, controlada y de alta calidad.


Supply current
230 VAC

Power
10W


CRI
85 (2200K)
93 (2700K-3000K-4000K)

2-Step MacAdam

Dimensions



Photometric diagrams

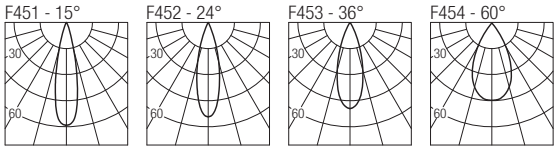

CCT/CRI/Flux

2200K	**810 lm**
2700K	**840 lm**
3000K	**930 lm**
4000K	**960 lm**

Code construction

RG1 X X X X

- X (4th): **ON** On/off; **DL** DALI-PUSH
- X (3rd): **N** 15°; **S** 24°; **M** 36°; **W** 60°
- X (2nd): **1** 2200K; **2** 2700K; **3** 3000K; **4** 4000K
- X (1st): **1** White; **2** Grey; **5** Black; **6** Bronze

Accessories

LRG101
Low luminance louver



SRG101
Milky screen



Note
The filter and the screen must be ordered together with the lighting fixture.