FLEXA
LIGHTING

# YOLA

Ceiling mounted luminaire

IP20 made in Italy

design Roberto Mantovani



The Yola range of surface-mounted luminaires, equipped with an integrated on/off or dimmable driver, combines high optical performance with a clean, sophisticated design. Designed for applications ranging from accent to general lighting, it integrates discreetly into the architecture, enhancing the space through precise, controlled and high-quality light.

La gamma di apparecchi a plafone Yola, dotata di driver integrato on/off o dimmerabile, combina elevate prestazioni ottiche con un design essenziale e sofisticato. Pensata per applicazioni che spaziano dalla luce d'accento all'illuminazione generale, si integra con discrezione nell'architettura, valorizzando lo spazio attraverso una luce precisa, controllata e di elevata qualità.

La gamme de luminaires en saillie Yola, équipée d'un driver intégré on/off ou dimmable, associe des performances optiques élevées à un design épuré et sophistiqué. Conçue pour des applications allant de l'éclairage d'accentuation à l'éclairage général, elle s'intègre discrètement dans l'architecture et valorise l'espace grâce à une lumière précise, maîtrisée et de haute qualité.

Die Serie Yola umfasst Aufbauleuchten mit integriertem On/Off- oder dimmbarem Treiber und verbindet hohe optische Leistung mit einem klaren, anspruchsvollen Design. Für Anwendungen von der Akzent- bis zur Allgemeinbeleuchtung konzipiert, integriert sie sich dezent in die Architektur und wertet den Raum durch präzises, kontrolliertes und hochwertiges Licht auf.

La gama de luminarias de superficie Yola, equipada con driver integrado on/off o regulable, combina elevadas prestaciones ópticas con un diseño limpio y sofisticado. Pensada para aplicaciones que abarcan desde la iluminación de acento hasta la iluminación general, se integra discretamente en la arquitectura, realzando el espacio mediante una luz precisa, controlada y de alta calidad.


**Supply current**
230VAC

**Power**
10W


**CRI**
85 (2200K)
93 (2700K-3000K-4000K)

**2-Step MacAdam**

**Dimensions**




**Photometric diagrams**

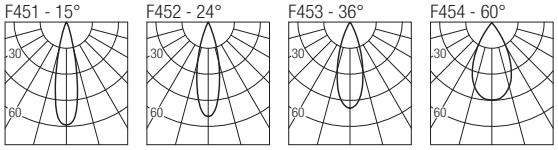


**CCT/CRI/Flux**

| | |
|---|---|
| 2200K | **810 lm** |
| 2700K | **840 lm** |
| 3000K | **930 lm** |
| 4000K | **960 lm** |

**Code construction**

**YL1 X X X X**

- **ON** On/off — **DL** DALI-PUSH
- **N** 15° — **S** 24° — **M** 36° — **W** 60°
- **1** 2200K — **2** 2700K — **3** 3000K — **4** 4000K
- **1** White — **2** Grey — **5** Black — **6** Bronze

## Accessories

**LYL101**
Low luminance louver

**SYL101**
Milky screen

**Note**
The filter and the screen must be ordered together with the lighting fixture.