

## CASSIUS

IP rated projectors

design Roberto Mantovani



The Cassius range offers IP65 24VDC projectors in anodised aluminium, suitable for installation in particularly aggressive environments. The optical quality and fine finishes merge into a product of great reliability. Can be fitted with an anti-glare filter for maximum visual comfort.

La gamma Cassius offre proiettori IP65 a 24VDC in alluminio anodizzato, ideali all'installazione in ambienti particolarmente aggressivi. Qualità ottica e finiture di pregio si fondono in un prodotto di grande affidabilità. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

La gamme Cassius propose des micro-projecteurs IP65 en aluminium anodisé, indiqués pour installations en milieu particulièrement agressifs. La qualité optique et la finesse des finitions se combinent pour donner un produit très fiable. Peut être équipé de filtre anti-éblouissement pour le plus grand confort visuel.



IP65 made in Italy

Die Cassius-Reihe bietet IP65 24VDC-Projektoren aus eloxiertem Aluminium, die für die Installation in besonders aggressiven Umgebungen geeignet sind. Optische Qualität und feine Verarbeitung verbinden sich zu einem höchst zuverlässigen Produkt. Kann mit Blendschutzfilter für maximalen Sehkomfort ausgestattet werden.

La gama Cassius ofrece proyectores IP65 de 24VDC de aluminio anodizado, adecuados para la instalación en ambientes especialmente agresivos. La calidad óptica y los acabados finos se combinan en un producto de gran fiabilidad. Se puede equipar con un filtro antideslumbrante para un máximo confort visual.

### Supply current


24 VDC

### Power


2 W

### Parallel wiring

### Dimensions



### Photometric diagrams

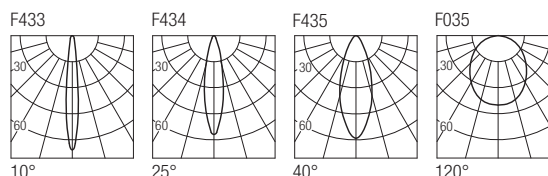


### CCT/CRI/Flux

2700K	128lm
3000K	133lm
4200K	154lm

### Code construction


CAS X X X

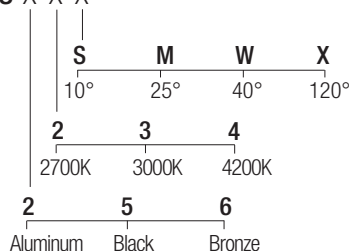

Note: cable cut to measure on request

### Optionals

XP0022  
Earth spike



LCAS01  
Low luminance louver



Note: the filter must be ordered together with the lighting fixture

XNTC02  
White  
Antiglare snoot

XNTC05  
Black


XNTC06  
Bronze



XXT01  
Tree strap



### Photometric diagrams

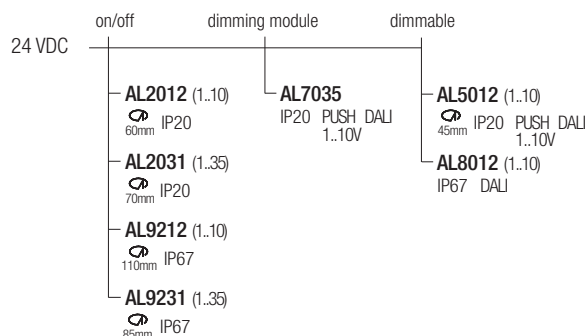

Note: dimming module AL7035 to be used in combination with a 24VDC power supply